


WINHO HIGH SPEED PRECISION LATHE : S480*1000



Standard Accessories

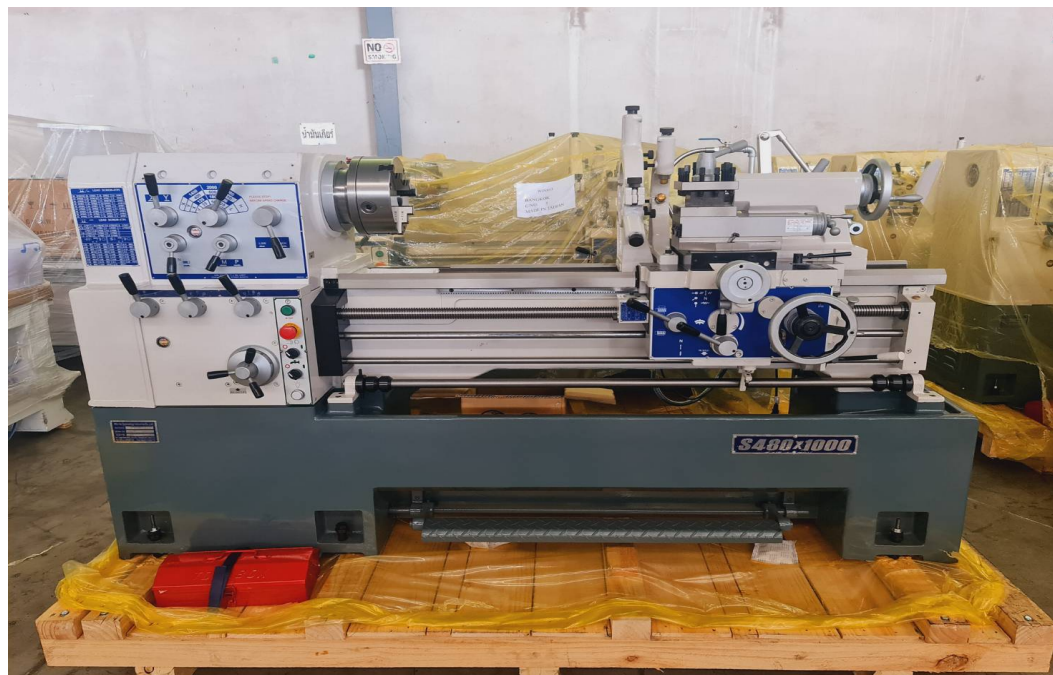

- 3 JAWS UNIVERSAL CHUCK 9" (SC)
- 4 JAWS INDIPENDENT 10"



- LED WORK LIGHT



- FOLLOW REST



- STEADY REST (ROLLER)



- MEDIUM DUTY ROTARY CENTER MT4

Specifications	S480*1000
Swing over bed	480 mm (18-1/2")
Swing over cross slide	280 mm (11")
Center Height	235 mm (9-1/4")
Center distance	1000mm (40")
Swing over gap	690 mm (27-1/8")
Bed Width	300 mm (11-4/5")
Spindle nose	ASA D1 -6 / D1 -8 (Opt.)
Spindle bore	58 mm (2-1/4") / 80 mm (3") (Opt.)
Taper of spindle bore	MT6/MT7 (Opt.)
Spindle speed	20~2000 rpm (12 steps)-spindle bore:58mm / 40~2000 rpm (12steps)-spindle bore:80mm
Inch Threads range	4~56 TPI
Metric Threads Range	P0.5~P7
Longitudinal feeds range	0.05~0.82 mm (0.002~0.032")
Cross feeds range	0.02~0.4 mm (0.001~0.0094")
Leadscrew Diameter	35 mm (1-1/3")
Leadscrew pitch	4TPI or 6 mm
Taper of tail center	MT4
Tail spindle travel	150 mm (5-7/8")
Tail spindle diameter	68 mm (2-2/3")
Main drive motor	7.5HP (5.625KW) / 10HP (7.5KW. Opt.)
Coolant pump	1/8HP (0.1 KW)
Compound rest travel	125 mm (4-7/8")
Cross slide travel	245 mm (9-2/3")
Machine / Packing Dimensions (cm)	L:215 W:81 H:122 / L:228 W:95 H:168
Net weight / Gross weight (kgs)	1800 / 1900